




Use N-1953 End Cap.


CONCRETE INSERT						
CATALOG NUMBER	LENGTH		WEIGHT PER 100		DESIGN LOAD	
	in	mm	lbs	kg	lbs	kN
<b>N-3350</b>	4	101.6	95	43.1	800	3.58
<b>N-3351</b>	6	152.4	128	58.1	1000	4.48
<b>N-3352</b>	8	203.2	155	70.3	1200	5.38

End Cap  
N-1953

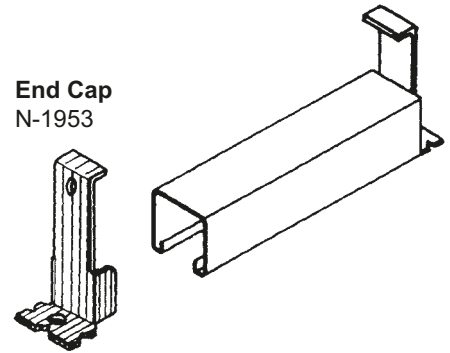

Use N-1933 End Cap.

CONTINUOUS CONCRETE INSERT				
CATALOG NUMBER	A		WEIGHT PER 100	
	in	mm	lbs	kg
<b>N-3353</b>	12	304.8	202	91.7
<b>N-3354</b>	16	406.4	262	118.9
<b>N-3355</b>	20	508.0	316	143.5
<b>N-3356</b>	24	609.6	376	170.7
<b>N-3357</b>	32	812.8	496	225.2
<b>N-3357A</b>	36	914.4	556	252.4
<b>N-3358</b>	40	1016.0	616	279.7
<b>N-3359</b>	48	1219.2	736	333.8
<b>N-3360</b>	60	1524.0	915	415.4
<b>N-3361</b>	72	1828.8	1095	497.1
<b>N-3362</b>	84	2133.6	1274	577.9
<b>N-3363</b>	96	2438.4	1453	659.7
<b>N-3364</b>	108	2743.2	1633	740.7
<b>N-3365</b>	120	3048.0	1813	822.4
<b>N-3366</b>	144	3657.6	2173	985.7
<b>N-3367</b>	168	4267.2	2533	1148.9
<b>N-3368</b>	192	4876.8	2893	1312.2
<b>N-3369</b>	216	5486.4	3253	1475.5
<b>N-3370</b>	240	6096.0	3613	1638.8

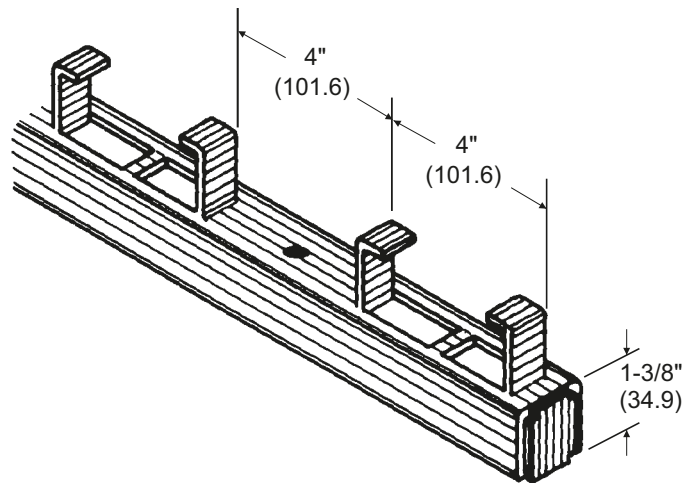

Design load for N-3353 through N-3370 is 2000 lbs (8.96 kN) per foot with a safety factor of 3 in average good concrete.

Loads concentrated within the last 2" (50.8) of concrete inserts 8" (203.2) and longer should not exceed 1000 lbs (4.48 kN).

Concrete insert should be secured to the forms on 16" (406.4) to 24" (609.6) intervals.

N-3370 Continuous Concrete Inserts are made from N-300 channel. Use channel nuts designed for use in N-300 channel. Styrofoam fillers are supplied with all concrete inserts.